

# **RATIONALITY TO THE BEHAVIOUR OF RIVER SYSTEMS AND DISIPATION OF DRAINAGE GENERATED ENERGY**

**Dr. N.L. Dongre, IPS, Ph.D., DLitt**



*The Nagduari Gorge (Pachmarhi , India) emerged that drainage networks naturally evolved into structures that are most efficient in draining their water sheds*

**Abstract.** The reflections of energy dissipation on channel behaviors of a river system are investigated. On the basis of local and global opinions of optimality in energy expenses, it is investigated that the relationships between channel geometry, flow velocity, channel bed slope, and stream flow conditions in optimal river systems. Expressions for the rate of energy dissipation per unit channel area  $P_a$  are derived as functions of cumulative drainage area and river network parameters. Optimal channel characteristics are developed that satisfy the opinions of local optimality, and provide constant  $P_a$  throughout the river network. It is shown that these optimal channel characteristics are remarkably similar to those of many natural river systems in their downstream hydraulic geometry exponents, channel bed slope scaling, spatial distribution of average flow velocity, boundary shear, resistance to flow, etc. Optimal combinations of channel downstream hydraulic geometry and basin topography were analyzed on data from Ngduari Gorge, Pachmarhi. It is found that ranges of optimality for the combination of the downstream hydraulic geometry exponent for width of Leopold and Maddock [1953] ( $0.32 < b < 0.74$ ), and the channel bed slope scaling exponent ( $-0.65 < z < -0.29$ ), and argue that river networks develop average channel properties within these ranges in order to attain constant  $P_a$  throughout the network. It is proposed that the opinions of local optimality is a central principle that explains the average behavior and adjustment of channel characteristics in natural river systems.

## 1. Introduction

River networks are dynamic and complex systems with branched structures that reflect a high standard of regularity and spatial organization. This regularity has inspired to study the aggregation patterns of river networks and to search for fundamental principles that relate their structure and channel characteristics. The drainage networks naturally evolve into structures that are most efficient in draining their watersheds [Leopold and Langbein, 1962]. Ability, in this context, was associated with work that a river network performs in transporting water and sediment, or with the rate and distribution of energy expenditure in the runoff process. It was postulated that river systems develop toward a state in which an approximate equilibrium between channel form and the imposed water and sediment load is produced [Leopold and Maddock, 1953, Andrew Gondie 2013, Singh Vijay P. 2003] It was argued that this is also a state of minimum energy expenditure [Leopold and Langbein, 1962; Langbein and Leopold, 1964]. Concepts of minimum energy expenditure have been applied to theoretically derive the downstream hydraulic geometry exponents of Leopold and Maddock [1953] observed in natural river systems [e.g., Langbein, 1964; Williams, 1978]. The conjecture that channels adjust toward an equilibrium state in which stream power or energy dissipation is minimum has also been successfully applied to numerous other fluvial problems [e.g., Chang, 1979; Yang and Song, 1986].

The rivers in equilibrium of optimal energy expenditure has been used to describe the structure and shape of optimal river networks and to define a set of principles that govern the evolution of river networks to the optimal state [Rodriguez-Iturbe et al., 1992]. In their seminal work, Rodriguez-Iturbe et al. [1992] postulated three principles of optimal energy expenditure that define the optimal topological structure of a network, as well as its channel characteristics, and proceeded to derive from them other important properties of drainage networks. Their work led to the definition and modeling of optimal channel networks (OCNs) that exhibit remarkable similarities with river networks extracted from digital elevation models (DEMs) in their fractal aggregation structure and other empirical Geomorphological properties [Rodriguez-Iturbe et al., 1992; Rinaldo et al., 1992; Ijidsz-Vdsquez et al., 1993; Rigon et al., 1993; Sun et al., 1994]. Models of OCNs describe the formation of optimal topological structures by minimizing the total rate of energy expenditure. River networks closely resembling OCNs have also been obtained without optimizing energy expenditure, using physically based models of water and sediment transport in network and catchment evolution [Wilgoose et al., 1989] and models of self-organized criticality with a stable landscape dependent on a critical erosion threshold [Rinaldo et al., 1993; Rigon et al., 1994]. The principles of Rodriguez-Iturbe et al. [1992] are restated here in the form of a local and a global hypothesis of optimality in drainage network evolution. The local hypothesis states that a river network adjusts its channel properties toward an optimal state in which the rate of energy dissipation per unit channel area is constant throughout the network. The global hypothesis states that a river network adjusts its topological structure toward a state in which the total rate of energy dissipation in the network is minimum. An important feature of natural river networks is their dynamic nature. River systems respond to spatially and temporally variable external driving forces (discharge and sediment load) by adjusting their cross-sectional form, bed configuration, channel pattern, and bed slope. In this sense, the local optimality hypothesis addresses the short-term adjustment of internal channel geometry and roughness in response to short-term fluctuations in discharge and sediment load. On the other hand, the global optimality hypothesis addresses the long-term adjustment of the topological structure of the river

network in response to geologic driving forces, continuous erosion, and long-term changes in the runoff amount and sediment supply. In addition to external driving forces, there are other constraints that can control river network adjustment. It has been argued that a natural river will develop characteristic forms (such as average downstream hydraulic geometry) that are relatively stable on an appropriate timescale between short-term adjustment and long-term evolutionary tendencies [e.g., *Leopold and Maddock*, 1953; *Knighton*, 1984, p. 162; *Petts and Foster*, 1985 *Paola Chris, Straub Kyle, Mohrig David*, 2009]. In any natural river system, fluctuations will occur about the characteristic average behavior in response to fluctuations in the controlling variables and the resistance and susceptibility of the river system to change.

In this article it is concentrated mostly on the hypothesis of local optimality. It is argued that if this hypothesis applies to drainage networks, then it must be visible in the spatially and temporally averaged distribution of their channel characteristics (in particular the downstream hydraulic geometry relations of *Leopold and Maddock* [1953]). The main objective is to develop relations between channel properties, discharge, sediment load, and the rate of energy expenditure throughout a river network, and from them derive so called optimal channel characteristics of river networks where the energy dissipation rate per unit channel area is constant. The results from Nagduari Gorge, Pachmarhis (India) indicate that the condition of a constant energy dissipation rate per unit channel area in an optimal river network can be attained by a complex interaction of channel geometry, topography, and discharge driving conditions that leads to channel properties remarkably similar to those observed in many natural river systems.

## 2. Energy Dissipation rate in a River Network

Rivers are non-conservative systems. In the drainage process, potential energy of water on the hillslopes is transformed into kinetic energy of the flowing fluid-sediment mixture in the river network. In this process, energy is dissipated from the system. It is generally accepted that fluvial systems perform work (1) against friction at the boundary, (2) against viscous shear and turbulence (internal friction), (3) in transporting sediment load and flood debris, and (4) in eroding the channel bed [*Knighton*, 1984, p. 54]. However, it is difficult to quantify energy dissipation rates associated with each process separately. In most rivers the main source of energy dissipation is due to friction of the fluid-sediment mixture at the boundary and can be computed from the power equation [e.g., *Yang and Song*, 1986; *Julien*, 1995, p. 42]. This section discusses the development of the energy expenditure relation and its application to a river network.

### 2.1. Generated Energy Dissipation by Fluid in Motion

The drainage generated power or rate of work done by river flow is a scalar quantity derived by the product of the vectors of force and velocity. The non-conservative, dissipative term in the power equation for irrotational flow is a volume integral representing the rate at which mechanical energy is dissipated from the system (transformed into heat). It is the term that defines the work that the fluid element needs to do to overcome friction, and will be called the rate of energy dissipation,  $P_{\text{diss}}$  [e.g., *Molnar*, 1996]. After neglecting linear deformation by tension against the bed, banks, or surface, the final form of the rate of energy dissipation  $P_{\text{diss}}$  due to friction in an incompressible fluid under irrotational flow conditions can be expressed as

$$P_{\text{diss}} = \int_V \left[ \tau_{xx} \left( \frac{\partial v_z}{\partial x} + \frac{\partial v_x}{\partial z} \right) + \tau_{yy} \left( \frac{\partial v_x}{\partial y} + \frac{\partial v_y}{\partial x} \right) + \tau_{yz} \left( \frac{\partial v_z}{\partial y} + \frac{\partial v_y}{\partial z} \right) \right] dV \quad (1)$$

where  $\tau_{ij}$  are tangential and normal stresses,  $v_i$  are flow velocity components in the respective directions, and  $V$  is the control volume. To obtain the spatial distribution of the rate of energy dissipation in a river network using (1), assumptions need to be made about the flow conditions, as well as about the structure of the river network.

### 2.2. Assumption to a River Network

Assuming one-dimensional flow in the  $x$  direction leads to  $v_y = v_z = 0$ . Neglecting the effect of secondary flows is appropriate in the context of this study, where the large-scale behavior of a river

system than in describing detailed hydraulics in a particular river cross-section. Transversal shear stresses are induced by secondary flows; therefore  $\tau_{yz} = 0$  (for irrotational flow  $\tau_{xy} = \tau_{yx}$  and  $\tau_{xz} = \tau_{zx}$ ) Equation (1) then reduces to

$$P_{\text{diss}} = \int_V \left( \tau_{zx} \frac{\partial v_x}{\partial z} + \tau_{yx} \frac{\partial v_x}{\partial y} \right) dV \quad (2)$$

Thus the rate of energy dissipation is related with bed and bank shear stresses, and with gradients of the velocity field in the vertical and horizontal directions. The product of these two terms, integrated over a control volume, gives the energy dissipation rate under given conditions.

A river network of Nag Duari Gorge consists of a series of rectangular channel links of different lengths, widths, and flow depths. Equation (2) can then be applied to any one of these rectangular channel links. In each link the bed shear stress  $\tau_{zx}$  and the bank shear stress  $\tau_{yx}$  are equal to an average boundary shear stress acting on both bed and banks, and that the velocity gradient near that boundary is equal to the vertical velocity gradient. Most energy dissipation occurs in a boundary layer of depth  $l$  and that within it, shear stress remains constant and equal to the average boundary shear stress  $\tau_0$ . under these assumptions, (2) reduces to

$$P_i = LP_w \tau_0 \int_0^l \frac{\partial v_x}{\partial z} dz = LP_w \tau_0 v(l) \quad (3)$$

where  $P_i$  is the energy dissipation rate of a fluid-sediment mixture in motion in link  $i$ ;  $L$  and  $P_w$  are the channel link length and wetted perimeter, respectively; and  $v(l)$  is the flow velocity as a function of the boundary layer. The depth of this layer  $l$  can be defined by the flow depth at which the actual velocity  $v(l)$  equals the depth-averaged velocity  $v$ . Then (3) can be approximated as

$$P_i = LP_w \tau_0 v \quad (4)$$

This assumption is important to the practical application of the energy dissipation theories to river networks. A depth-averaged velocity is fairly easily defined and determined from discharge and cross-sectional area, whereas a complete velocity distribution at every point in a river network is not.

Under uniform flow, boundary shear stress can be determined from

$$\tau_0 = \gamma_m R_h S \quad (5)$$

where  $\gamma_m$  is the submerged specific weight of the fluid-sediment mixture,  $R_h$  is the hydraulic radius of the link, and  $S$  is the link channel bed slope. The energy dissipation rate  $P_i$  then becomes

$$P_i = \gamma_m L S Q \quad (6)$$

where  $Q$  is discharge. All variables are particular to the studied link  $i$ . the total energy dissipation rate  $P_t$  in a river network composed of  $n$  links, is then

$$P_t = \sum_{i=1}^n P_i \quad (7)$$

The effect of sediment transport on energy expenditure in (6) is in the form of added weight to clear water. The fluid-sediment mixture then has a submerged specific weight

$$\gamma_m = g[\rho_s C_V + \rho_w(1 - C_V)] = g \rho_w [1 + C_V(G - 1)] \quad (8)$$

where  $g$  is gravitational acceleration,  $\rho_w$  and  $\rho_s$  are the mass densities of water and sediment,  $C_V$  is the volumetric sediment concentration, and  $G$  is the specific gravity of sediment ( $G = \rho_s/\rho_w$ ; ) the specific gravity of quartz particles submerged in water is approximately equal to 2.65). Commonly, sediment concentrations are too low to add significant weight to the fluid-sediment mixture. However, sediment transport also affects the velocity profile in a river section and therefore the depth-averaged velocity in (4) [e.g., *Parker and Coleman, 1986*].

### 3. Openion of Optimal Energy Expenditure in River Networks

*Rodriguez-Iturbe et al. [1992]* show that under certain assumptions, a joint application of optimality principles that relate the topological structure of a river network and its individual elements with the rate of energy expenditure in the system as a whole and each of its elements can be sufficient to explain the internal organization and the tree-like structure of a drainage network. The three principles of *Rodriguez-Iturbe et al. [1992]* are restated in this study as the following local and global optimal energy expenditure hypotheses.

**Local optimal energy expenditure:** A river network adjusts its channel characteristics toward a state in which the rate of energy dissipation per unit channel area  $P_a$  is constant throughout the river network

**Optimal energy expenditure:** A river network adjusts its topological structure toward a state in which the total rate of energy dissipation  $P_t$  in the river network is minimum.

The local and global optimality define the optimal condition of a river network. Concentration on the hypothesis of local optimality as it is applicable to adjustment of channel geometry.

In this section it is generalized the results of *Rodriguez-Iturbe et al. [1992]* to river networks with variable velocity and roughness, and discuss some implications of this generalization on total energy expenditure.

#### 3.1. Velocity and Roughness in an Optimal Network

*Rodriguez-Iturbe et al. [1992]* state that the rate at which energy is expended due to friction of the fluid with the boundary and channel maintenance in a channel reach may be written as

$$P_i = C_f \rho_w \frac{v^2}{R_h} QL + K \tau_0^n P_w L \quad (9)$$

The first term on the right-hand side in (9) is the rate of energy expenditure due to friction with the boundary, with  $C_f$  as a resistance coefficient representing a measure of total roughness of the channel system. This term is identical to (6), with  $C_f$  related to the Darcy-Weisbach friction factor  $ff$  under conditions of no sediment transport as  $C_f = ff/8$ . The second term in (9) represents the rate of energy expenditure involved in the removal and transport of sediment which would otherwise accumulate in the channel. It has the form of a bed load sediment transport equation, with constants  $K$  and  $n$  depending on the soil and fluid properties. *Rodriguez-Iturbe et al. [1992]* assume that total roughness throughout a river system is approximately constant and apply the local optimal energy expenditure hypothesis of a constant energy dissipation rate per unit channel area

$$P_a = \frac{ff}{8} \rho_w v^3 + K \tau_0^n = \text{const} \quad (10)$$

to conclude that in an optimal river network, average velocity will be constant. They therefore limit their optimal river networks to those where roughness and flow velocity are constant.

It is specified that flow velocity, channel roughness, and geometry are inter related. It is observed that one neglects the channel maintenance term and allows channel roughness and velocity to vary, it follows from (10) that the local optimality opinion is satisfied when

$$fv^3 = \text{const} \quad (11)$$

This observation describes an expanded class of optimal river networks by including networks with variable flow velocity and roughness. It is essential to recognize this interconnectedness of flow velocity and channel roughness throughout the network in the context of the local optimal energy expenditure opinion.

The global optimal energy expenditure hypothesis requires that in an optimal river network the total rate of energy dissipation  $P_t$  be minimum, which in turn implies that the rate of energy dissipation in every link  $P_i$  is minimum. Minimizing (9) by letting  $d(P_i)/dH = 0$  led *Rodriguez-Iturbe et al.* [1992] to the following scaling relationships between optimal channel depth, width, and discharge throughout the network:

$$H \propto Q^{0.5} \quad W \propto Q^{0.5} \quad (12)$$

The measuring exponent 0.5 for both the optimal channel depth and width is a consequence of assuming constant velocity and roughness in the river network.

The effect of a consistent trend in velocity on the measuring exponent in an optimal river network can be shown by manipulating (9) and neglecting the energy term associated with channel maintenance to obtain

$$P_i = \frac{QL}{H} \frac{1}{v} \rho_w \frac{1}{8} [ffv^3] + HL\rho_w \frac{1}{4} [ffv^3] \quad (13)$$

According to (11), the term in brackets in (13) representing a function of channel roughness and velocity is constant under the local hypothesis of optimal energy expenditure. Let us assume that average flow velocities in the river network exhibit a downstream trend with discharge of the form

$$v \propto Q^m \quad (14)$$

where  $Q$  is discharge of the same frequency everywhere in the network and  $m$  is a constant for the network [*Leopold and Maddock*, 1953]. Then minimizing  $P_i$  generalizes the scaling relationships between optimal channel depth, width, and discharge of *Rodriguez-Iturbe et al.* [1992] to

$$H \propto Q^{0.5-(m/2)} \quad W \propto Q^{0.5-(m/2)} \quad (15)$$

In a river network that satisfies the local optimal energy expenditure opinion of a constant energy dissipation rate per unit channel area, the measuring relationships between channel depth, width, and discharge can be different from 0.5 (less than 0.5 assuming an overall increase in velocities downstream). Observations of average flow velocities in natural river systems show  $m$  ranging mostly between 0 and 0.3 [*Park*, 1977]. Although it is neglected that the channel maintenance term in (9) in the above analysis, it can readily be shown that the developed scaling relationships in (15) also hold for the condition, where the channel maintenance term would be constant throughout the network (which is not a bad assumption for stable natural rivers). It should also be pointed out that a rectangular channel cross section and a constant width-depth ratio throughout the river network has been assumed ( $b = f$ ). However, the scaling relationships in (15) also hold for trapezoidal cross sections where the width-depth ratio can vary throughout the network as a function of the bank declination angle [see *Rodriguez-Iturbe and Rinaldo*, 1997, p. 256].

### 3.2. Models of Optimal Channel Networks

By adding the rate of energy expenditure from all links of the network, the total rate of energy dissipation in a river network  $P_t$ . Assuming a scaling relationship between channel bed slope and discharge of the form [*Langbein and Leopold*, 1964; *Carlston*, 1968]

$$S \propto Q^\zeta \quad (16)$$

$P_t$  becomes

$$P_t = \sum_i P_t = \text{const} \sum_i SQ = \text{const} \sum_i Q^\eta \quad (17)$$

Where  $\eta$  is the energy exponent equal to

$$\eta = \zeta + 1 \quad (18)$$

According to the global optimal energy expenditure hypothesis,  $P_t$  should be minimum in the optimal network. Therefore the topological arrangement of network links that drains a given area with the lowest possible value of  $P_t$  is defined as the OCN for that drainage area [Rodríguez-Iturbe *et al.*, 1992]. There are many topological solutions to this minimization problem. The model in (17), together with the hypothesis of global optimality, has been used to simulate OCNs with topological characteristics and properties very similar to natural river systems (drainage area is commonly used as a surrogate for discharge) [e.g., Rinaldo *et al.*, 1992; Ijjasz-Visquez *et al.*, 1993; Rigon *et al.*, 1993; Sun *et al.*, 1994].

The energy measuring exponent  $\eta$  connects local energy expenditure principles with the overall topological structure of the OCN [e.g., Sun *et al.*, 1994; Troutman, 1996]. On the basis of (15) and the hypothesis of local optimality, it can readily be shown that for the specific condition  $b = f$ ,

$$\eta = 0.5 - m/2 = b \quad (19)$$

The role of the energy exponent  $\eta$  has been intensively studied in the OCN context. The original OCN definition assumes constant velocity  $m = 0$  and therefore  $\eta = 0.5, b = f = 0.5$  and  $\zeta = -0.5$  in the context of our study,  $\eta = 0.5$  provides a threshold in the distribution of average flow velocity in the OCN. For  $\eta > 0.5$  velocity increases downstream, and for  $\eta < 0.5$ , velocity decreases downstream.

Rinaldo *et al.* [1992] and Rigon *et al.* [1993] indirectly relax the assumption of constant velocity in a network by simulating optimal networks using exponents  $\eta$  different from 0.5. On the basis of numerical experiments, Rinaldo *et al.* [1992] conclude that OCNs with  $0 < \eta < 1$  tend to be visually characterized by similar aggregation patterns. For  $\eta \geq 1$  or  $\eta \leq 0$  they did not observe Hortonian features in simulated OCNs. The limiting case of  $\eta = 0$ , does not give any preference to aggregation and minimizes total channel length in the OCN context. The case of  $\eta = 1$ , on the other hand, leads to directed networks and minimizes the mean link length to the outlet in the OCN context. From what it is shown in (18) and (19), this would require slopes independent of discharge and a decrease in flow velocity downstream. Such conditions are indicative of unchannelized hill slope runoff, which was also concluded by Rigon *et al.* [1993] from their simulations of OCNs.

Troutman and Karlinger [1994] estimated the exponent  $\eta$  from river network data using a two-parameter Gibbsian probability model to characterize the spatial behavior of river networks. Their results give an average  $\eta = 0.75$ , and there seems to be a tendency for  $\eta$  to be greater than 0.5 even at scales greater than the hillslope scale. Analytical solutions were obtained for the global minima to equation (17) under specific conditions [Maritan *et al.*, 1996; Colaiori *et al.*, 1997]. Results show that natural river networks tend to be rather in states of local minima, and the proposition was made that nature chooses an approach of "feasible optimality" with a long memory in the evolution of its landscapes. Worse energetic performance, yet better representation of natural networks by OCNs in states of local optima, may imply a role of geologic and other constraints in the evolution of river networks [Rodríguez-Iturbe and Rinaldo, 1997, p. 353]. In any case, the energetic performance and structure of river networks remain interesting research topics

#### 4. Applying the Hypothesis of Local Optimality

It is proposed that in a river network, the local optimal energy expenditure criterion governs the average distribution of channel geometry. In this section it is used the downstream hydraulic geometry relations of *Leopold and Maddock* [1953] to describe the variation of channel geometry and develop the relation for the energy dissipation rate per unit channel area  $P_a$ . It is then used this relation to define the condition of local optimality in which  $P_a$  is constant throughout the network. The downstream hydraulic geometry exponents for width and depth to be equal (i.e., in general,  $b \neq f$ ).

Consider a river network composed of rectangular channel links, where the energy dissipation rate  $P_a$  in a given link is  $P_a = P_i/P_w L$ . Using (6) and (8) under local optimality, it results

$$P_a = g\rho_w[1 + C_V(G - 1)]\frac{SQ}{W+2H} = \text{const} \quad (20)$$

The crucial problem in determining  $P_a$  throughout a river network is in evaluating the network variables in (20). These variables describe the driving conditions (discharge and sediment concentration), the channel geometry, and the topography of the channel slope. They can be related to the area draining to each point in the river network (drainage area is a quantity that is easily defined from DEMs).

##### 4.1. Distribution of Driving Conditions and Channel Properties in a River Network

In hydrologic practice, flood quantiles are commonly related to drainage area. The flood quantile  $Q_p$ , with exceedance probability  $p$ , can be determined as [*Gupta et al.*, 1994]

$$Q_p = \psi_p A^{\theta(p)} \quad (21)$$

where  $A$  is the area draining to a point in the network,  $\theta(p)$ , is a scaling exponent dependent on  $p$ , and  $\psi_p$  is a network parameter dependent on  $p$  but constant throughout the network for a given discharge frequency. In the case of simple scaling,  $\theta(p)$  will be independent of the exceedance probability [*Gupta and Dawdy*, 1995].

To describe the downstream variation of channel geometry, it is used that the downstream hydraulic geometry relations of *Leopold and Maddock* [1953]. These simple power laws relating channel geometry and characteristic discharge are to be seen as a representation of the average behavior of channel geometry:

$$\begin{aligned} W_p &= a_p Q_p^b = a_p \psi_p^b A^{b\theta(p)} \\ H_p &= c_p Q_p^f = c_p \psi_p^f A^{f\theta(p)} \end{aligned} \quad (22)$$

where  $W_p$  and  $H_p$  are the flow width and depth of a channel at a point in the network corresponding to discharge  $Q_p$  and  $a_p, c_p$  are network constants dependent on discharge frequency, and  $b$  and  $f$  are channel flow width and depth scaling exponents (downstream hydraulic geometry exponents). The characteristic discharge has to be of channel-forming and -maintaining significance, with an equal frequency throughout the network.

Using the relation between channel bed slope and discharge in equation (16) it can be expressed that mean channel link slope as a function of drainage area:

$$S = sA^{z\theta(p)} sA^z \quad (23)$$

where  $s$  and  $z$  are network constants.

The spatial and temporal distributions of sediment concentration in a river network are probably the most difficult to

**Table 1. List of River Network Parameters Used in the Energy Expenditure Analysis**

River Network Characteristic	Parameters
Discharge	$\psi_p$ and $\theta(p)$
Channel bed slope	$s$ and $z$
Channel flow width	$a_p$ and $b$
Channel flow depth	$c_p$ and $f$
Sediment concentration	$k_p$ and $j$

estimate. One of the main reasons is that sediment load depends not only on the transport capacity of the stream, but also on sediment supply to the stream. A common technique (in supply-limited conditions) is to estimate the sediment concentration as a power function of discharge of a given frequency [e.g., *Leopold and Maddock, 1953; Julien, 1995, p. 229*]:

$$Cv_p = k_p Q_p^j = k_p \psi_p^j A^{ju(p)} \quad (24)$$

Where  $Cv_p$  is the volumetric sediment concentration corresponding to discharge  $Q_p$ ,  $k_p$  is a network constant dependent on discharge frequency, and  $j$  is a constant sediment scaling exponent. A list of all network parameters is provided in Table 1.

#### 4.2. Energy Dissipation Rate per Unit Channel Area

The rate at which energy is dissipated per unit channel area in any link in the network can then be obtained by combining (20) with the expressions for the individual network variables in (21) through (24). The resulting  $P_a$  is a function of the drainage area and all network parameters  $P_a = P_a(A; b, f, \dots)$ , and can be divided into the energy dissipation component due to water  $P_a^w$  and sediment  $P_a^s$ ,

$$P_a = P_a^w + P_a^s \quad (25)$$

where  $P_a^w$  is equal to

$$P_a^w = g\rho_w \frac{s\psi_p A^{\theta(p)+z}}{a_p \psi_p^b A^{b\theta(p)+2c_p \psi_p^f A^f \theta(p)}} \quad (26)$$

and  $P_a^s$  is equal to

$$P_a^s = g\rho_w (G - 1) \frac{k_p s_p^{j+1} A^{(j+1)\theta(p)+z}}{a_p \psi_p^b A^{b\theta(p)+2c_p \psi_p^f A^f \theta(p)}} \quad (27)$$

The estimation of river network parameters is a cumbersome task and may not be possible for rivers with inadequate data. As was stressed earlier, equations (26) and (27) for  $P_a$  are valid for long-term averaged behavior, and they are not to be used for prediction in a condition where the joint distribution of the network variables may invalidate the operations used to develop the formulas [*Troutman, 1996*].

#### 4.3. Minimization Aspects

In a network abiding by the local optimal energy expenditure hypothesis, the combination of all network parameters is such that  $P_a$  is constant throughout the network. Since  $P_a$  from (25) is a function of drainage area, local optimality will require

$$d(P_a)/dA = 0 \quad (28)$$

The above derivative will approach zero as a function of river network parameters. From the perspective of local optimality, the "best" set of network parameters is the one for which

**Table 2.** Values of River Network Parameters Calibrated With Nagduari Gorge Data for Maximum Monthly and Daily Streamflow Conditions With Exceedance Probabilities  $p$

Parameters	$p_m = 0.5$	$p_m = 0.1$	$p_m = 0.01$	$P_d = 0.5$
$\psi_p$	0.0675	0.1310	0.2247	0.8684
$\theta(p)$	0.949	0.966	0.979	0.950
$c_p$	0.3280	0.3550	0.3772	0.4337
$f$	0.317	0.321	0.324	0.320
$k_p$	$1.401(10^{-3})$	$1.507(10^{-3})$	$1.457(10^{-3})$	$3.0(10^{-3})$
$j$	0.249	0.339	0.409	0

In the calibration, discharge  $Q$  is in cubic meters per second, depth  $H$  is in meters, and volumetric Sediment concentration  $C_V$  is in cubic meters per cubic. After *Molnár and Ramírez* [this issue.]  $d(P_a)/dA$  is closest to zero throughout the network. Defining an optimality function  $h(b, f, \dots)$  as

$$h(b, f, \dots) = \frac{1}{A_0} \int_{A_t}^{A_0} \left| \frac{d(P_a(A; b, f, \dots))}{dA} \right| A dA \quad (29)$$

the optimal set of network parameters  $(b^*, f^*, \dots)$  is obtained by minimizing  $h$  as,

$$\begin{aligned} h(b^*, f^*, \dots) &= \min_{\forall(b, f, \dots)} h(b, f, \dots) \\ &= \min_{(b, f, \dots)} \frac{1}{A_0} \int_{A_t}^{A_0} \left| \frac{d(P_a(A; b, f, \dots))}{dA} \right| A dA \end{aligned} \quad (30)$$

The optimal set of network parameters  $(b^*, f^*, \dots)$  results in optimal channel characteristics of the river network. In (29) and (30),  $A_t$  is the drainage area associated with the channel initiation threshold, and  $A_0$  is the drainage area at the outlet of the basin. The optimality function  $h$  weighs  $d(P_a)/dA$  with the drainage area, thereby giving more weight to the mature downstream sections of the river network. The derivative  $d(P_a)/dA$  can be divided into its water and sediment components:

$$\frac{d(P_a)}{dA} = \frac{d(P_a^W)}{dA} + \frac{d(P_a^S)}{dA} \quad (31)$$

Where

$$\frac{d(P_a^W)}{dA} = g\rho_w s \psi_p \frac{[\theta(p)+z]A^{\theta(p)+z-1}K_1 - A^{\theta(p)+z}K_2}{K_1^2} \quad (32)$$

$$\begin{aligned} \frac{d(P_a^S)}{dA} &= g\rho_w(G-1)k_p s \psi_p^{j+1} \\ &\cdot \frac{[(j+1)\theta(p)+z]A^{(j+1)\theta(p)+z-1}K_1 - A^{(j+1)\theta(p)+z}K_2}{K_1^2} \end{aligned} \quad (33)$$

And where  $k_1$  and  $k_2$  are

$$\begin{aligned} k_1 &= a_p \psi_p^b A^{b\theta(p)+2c_p} \psi_p^f A^{f\theta(p)} \\ k_2 &= a_p \psi_p^b b\theta(p) A^{b\theta(p)-1} + +2c_p \psi_p^f f\theta(p) A^{f\theta(p)-1} \end{aligned} \quad (34)$$

## 5. Channel Characteristics

According to the theory in the previous section, channel characteristics can be described for every river network. It is found that these channel characteristics closely resemble the properties of many natural river systems. This indicates that the hypothesis of local optimality may be a central principle that explains the average distribution of channel properties in river networks. In addition, examples of the interrelationships between the downstream hydraulic geometry exponents and the slope scaling exponent in an optimal river network, the analyses were conducted with data from Nagduari Gorge, a small experimental watershed (21.4 km<sup>2</sup>) located in Pachmarhis, India. The watershed is well instrumented to measure stream flow, sediment load, channel properties, and other watershed parameters [Dongre, 2013] and is therefore ideal for an illustration of the application of energy expenditure hypotheses. This section contains the following investigations: (1) the optimal variation of channel width expressed by the exponent  $b$  in the downstream hydraulic geometry relation, (2) optimal combinations of channel width and depth expressed by the exponents  $b$  and  $f$ , and (3) the effect of channel topography expressed by the exponent  $z$  on optimal channel width.

In developing optimal downstream hydraulic geometry exponents for the Nagduari Gorge network, two different topographic conditions are explored. For the first condition, the exponent  $z$  of the power function relating channel slopes to drainage area in (23) was set to  $z = -0.5$  ( $s = 0.0094$ ,  $R^2 = 0.664$ ). This is the average value of the scaling exponent found by *Tarboton et al.* [1989] from numerous studies of DEM-extracted river networks and is also the value assumed in the OCN studies. The second condition was one where the best estimate of  $z$  fitted to Nagduari Gorge data was used,  $z = -0.622$  ( $s = 0.0105$ ,  $R^2 = 0.826$ ). [Dongre,2013]In addition, It is studied, four different characteristic stream flow-driving conditions. Maximum monthly discharges with exceedance probabilities  $p_m = 0.5$ ,  $p_m = 0.1$ , and  $p_m = 0.01$  represented channel-maintaining flow conditions, while mean maximum daily discharges with  $p_d = 0.5$  represented channel-forming flow conditions. The values of the river network parameters calibrated for the different stream flow conditions at Nagduari Gorge are in Table 2.

### 5.1. Width Exponent $b$

It is determined that the optimal downstream variation of channel flow width at Nagdurai Gorge under the local optimal energy expenditure opinions of equal  $P_a$  throughout the river network. This decipher to finding the width exponent  $b$  that minimizes the optimality function  $h(b, f, \dots)$  in (30), using the data derived river network parameters from Table 2. In order to ensure that the results for different flow and topographic conditions are comparable, It is maintained the same channel flow width at the outlet of the basin. Therefore when varying the exponent  $b$  in search for the optimum, It is continuously adjusted the coefficient  $a_p$  in (22) so that channel flow width at the watershed outlet corresponding to the discharge driving conditions was kept constant [Molnir and Ramiirez,

Figure 1a shows the downstream variation of  $P_a$  for the *optimal* case and two suboptimal cases of the exponent  $b$ . The associated downstream variation of the derivative  $d(P_a)/dA$  is shown in Figure 1b. The values of the optimal downstream hydraulic geometry exponent  $b$  and the associated values of constant  $P_a$  for every studied case are shown in Table 3. For the case  $z = -0.5$ , optimal  $b$  was between 0.488 and 0.506 (depending on the stream flow condition), which is close to the average value observed in many natural river systems [Leopold and Maddock, 1953; Carlston, 1969; Park, 1977; Knighton, 1984, p. 100]. For the case  $z = -0.622$ , optimal  $b$  was between 0.347 and 0.369, also within the range of observed values in natural river systems [Park, 1977]. The dependency of optimal  $b$  on the topography of the basin is clearly more significant than the dependency on discharge frequency. The optimal exponent also provides a threshold in the energy expenditure distribution throughout the basin. At values of  $b$  lower than op-

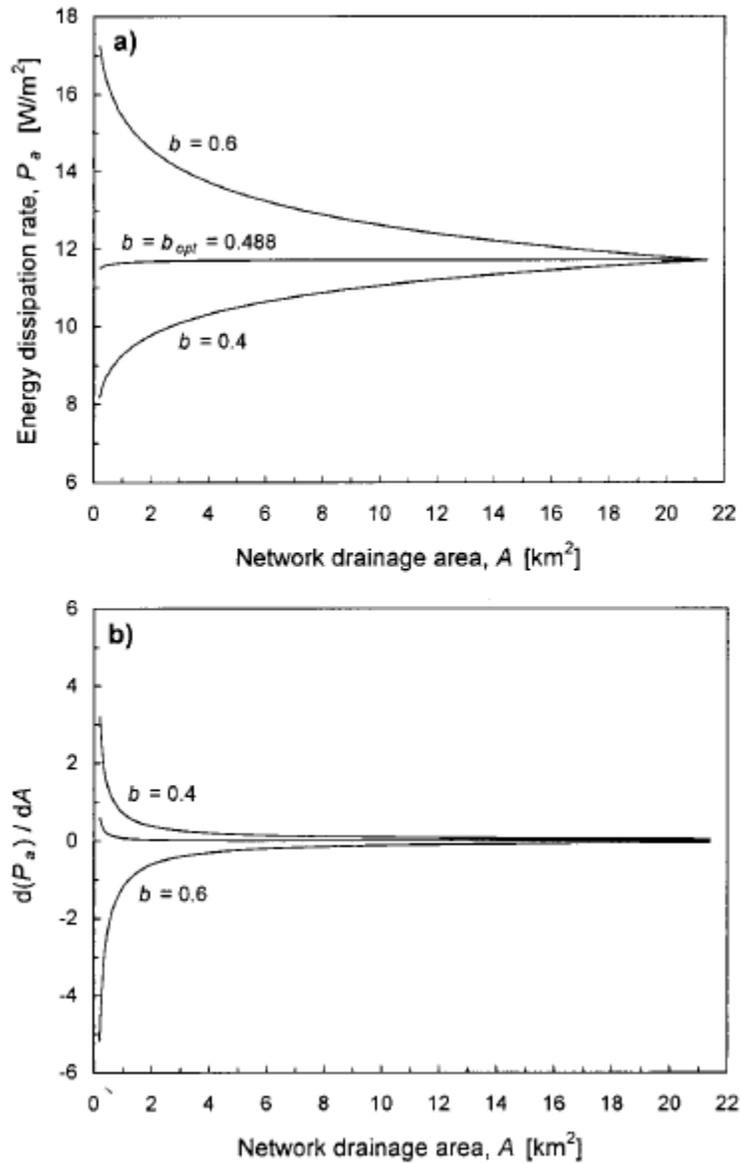


Figure 1. (a) Distribution of the energy dissipation rate  $P_a$  throughout Nagduari Gorge for optimal and suboptimal values of the exponent  $b$  for the maximum daily stream flow condition and  $z = -0.5$ . (b) Distribution of the derivative  $d(P_a)/dA$  with drainage area.

**Table 3.** Optimal Downstream Hydraulic Geometry Exponents  $b$ ,  $f$ , and  $m$ ; Constant Energy Dissipation Rate  $P_a$  at the Outlet of the Basin; and the Ratio  $P_a^S/P_a^W$  for Optimal Networks Developed for Maximum Monthly and Daily Streamflow Conditions With Exceedance Probabilities  $p$  and Topographic Conditions  $z = -0.5$  and  $z = -0.622$

	$p_m=0.5$	$p_m=0.1$	$p_m=0.01$	$P_d=0.5$
<i>Topographic Condition <math>z = -0.5</math></i>				
$b$ optimal	0.488	0.498	0.506	0.488
$f$ data-derived	0.317	0.321	0.324	0.320
$m$	0.195	0.181	0.170	0.192
$P_a, W \text{ m}^{-2}$	2.72	4.09	5.70	11.71
$P_a^S/P_a^W$	0.244 ( $10^{-2}$ )	0.340 ( $10^{-2}$ )	0.445 ( $10^{-2}$ )	0.495 ( $10^{-2}$ )
<i>Topographic Condition <math>z = -0.622</math></i>				
$b$ optimal	0.347	0.360	0.369	0.347
$f$ data-derived	0.317	0.321	0.324	0.320
$m$	0.336	0.319	0.307	0.333
$P_a, W \text{ m}^{-2}$	1.98	2.98	4.16	8.54
$P_a^S/P_a^W$	0.244 ( $10^{-2}$ )	0.340 ( $10^{-2}$ )	0.445 ( $10^{-2}$ )	0.495 ( $10^{-2}$ )


timal, upstream sections of the network dissipate energy per unit channel area at a lower rate than those downstream. At values of  $b$  higher than optimal, the process is reversed (Figure 1a)

From the optimal hydraulic geometry of the Nagduari Gorge network, it is determined that other channel characteristics in the optimal network. For instance, in Figure 2 shows the variation of boundary shear stress and resistance to flow with drainage area. Average boundary shear stress  $T_0$  is computed from (5). Shear stress is higher in the upstream sections of the network but remains fairly constant once drainage areas exceed about  $6 \text{ km}^2$  (mean drainage area at Nagduari Gorge is  $4.3 \text{ km}^2$ ). Bed shear is indicative of bed load sediment transport. [Dongre, 2012] reports that bed shear stress exceeding about 10 Pa is sufficient to induce bed load sediment transport at the Nagduari Gorge watershed outlet. The computed boundary shear stress at that location in the optimal networks ranged between 5 Pa and 20 Pa (depending mostly on flow condition) and will therefore be sufficient to induce bed load sediment transport at higher flow stages [Molnar and Ramirez, this issue]. The dimensionless Darcy-Weisbach friction factor  $ff$  was used to describe resistance to flow throughout the optimal network:

$$ff = \frac{8}{\rho_m} \frac{\tau_0}{v^2} \quad (35)$$

Figure 2b shows a general downstream decrease in the friction factor, similar to many natural river systems. Sections of the optimal river network draining less than approximately  $2.5 \text{ km}^2$  have  $ff$  in excess of 1.0 (for  $p_m = 0.01$ ). This would correspond to fairly steep ( $S$  up to 0.005) and rough ( $d_{50}$  up to 100 mm) gravel bed channels [Bathurst, 1993]. The values of  $ff$  for drainage areas above  $2.5 \text{ km}^2$  decrease from about 1.0 to 0.4 at the outlet of the basin. This would correspond to sand and gravel bed channels with moderate slopes [Bathurst, 1993]. Similar results were obtained for the other stream flow conditions. In Figure 2b the magnitude of  $ff$  increases with discharge at a given location in the network because of the large channel flow width increase between the two stream flow conditions. In a natural river system, higher resistance typical of overbank flow can increase total resistance to flow despite an increase in discharge [Bathurst, 1993].

The effect of sediment load in the form of added weight to

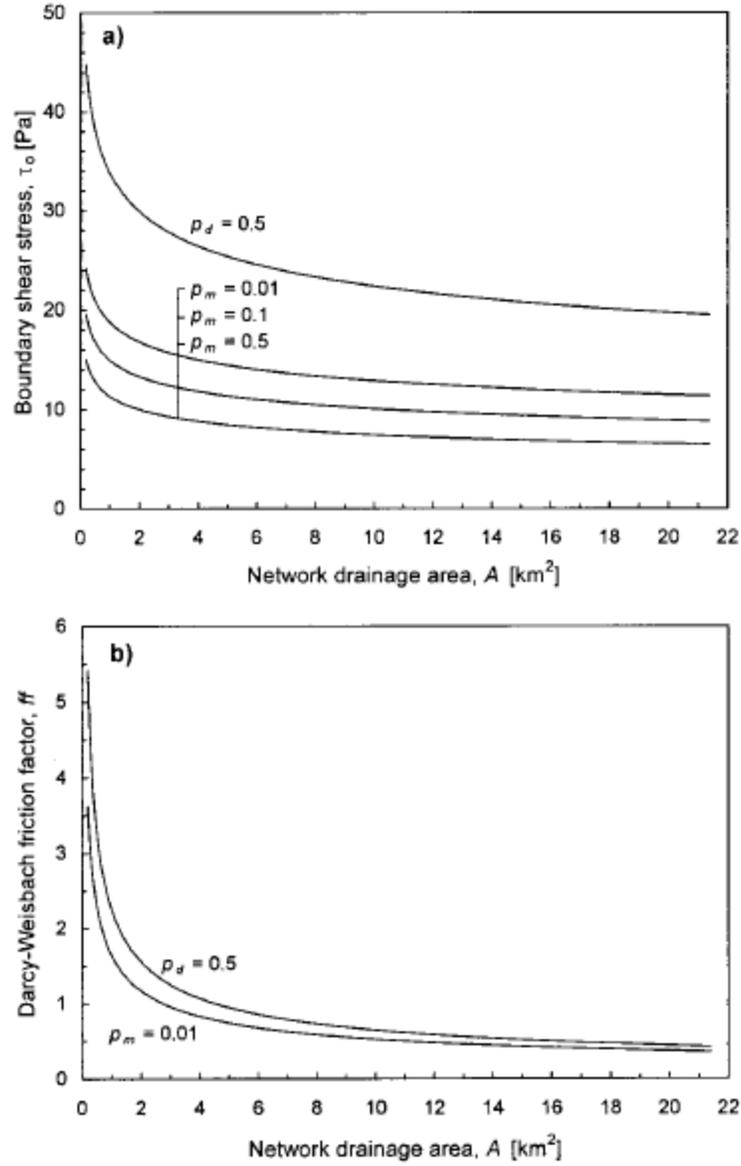

**Figure 2. Distribution of (a) average boundary shear stress  $\tau_0$  in an optimal river network with  $z = -0.5$ , and (b) Darcy-Weisbach friction factor  $ff$  in an optimal river network with  $z = -0.5$ .**

the fluid-sediment mixture on energy dissipation was found to be minimal at Nagduari Gorge. The ratios of the energy dissipation rates due to transporting sediment and water  $P_a^s/P_a^w$  computed from (26) and (27) for each condition are given in Table 3. The values of this ratio are less than 0.5% for all studied conditions at Nagduari Gorge.

## 5.2. Optimal Combination of $b$ and $f$

In the analysis of optimal channel characteristics up to this point, it is searched for the optimal width exponent  $b$  using the channel flow depth exponent  $f$  derived from Nagduari Gorge data. In order to generalize our results, It is explored that the optimal combination of  $b$  and  $f$  that results in constant  $P_a$ . and used a constrained, bivariate minimization procedure to find the optimal combination of  $b$  and  $f$  that minimized the optimality function  $h(b, f, \dots)$ . Again, to ensure comparability, it is varied both constants  $a_p$  and  $c_p$  in the downstream hydraulic geometry relations in (22), so that a constant width and depth at the watershed outlet was maintained for the different conditions [Molnár and Ramiirez, this issue]. The combinations of  $b$  and  $f$  that result in optimal networks for flow conditions  $p_d = 0.5$  and  $p_m = 0.01$  are shown in Figure 3. Only combinations that provide for an increasing width-depth ratio


downstream (which is commonly the case in natural river systems) are shown in the figure ( $b > f$ ). Optimal combinations of the exponents can be found with  $b$  ranging between 0.472 and 0.545 for  $z = -0.5$  and between 0.345 and 0.403 for  $z = -0.622$ . The corresponding exponent  $f$  varied between 0 and 0.491 for  $z = -0.5$  and between 0 and 0.366 for  $z = -0.622$ . The circles in Figure 3 show the combinations with the data-derived exponent  $f$  from Table 2. In nature the observed value of the depth exponent  $f$  has been found to vary between approximately 0.1 and 0.5, with the most probable value between 0.3 and 0.4, while the width exponent  $b$  has been found to vary between approximately 0.2 and 0.7, with the most probable value between 0.4 and 0.6 [P rk, 1977]. Our optimality analysis shows that within these ranges there can be numerous combinations of these exponents that satisfy the hypothesis of local optimality for a given river network, and that these combinations depend on the topography of the basin.

### 5.3. Optimal Combination of $b$ and $z$

It is clear from the cases in Figure 3 that the value of the optimal exponent  $b$  is significantly affected by the topography of the basin represented by the slope scaling exponent  $z$ . It is therefore analyzed the arrangement of topography and channel flow width throughout the river network on the basis of the local optimality hypothesis. The results for the maximum daily stream flow condition are shown in Figure 4, where the relation between  $b$  and  $z$  represents an optimal condition with data-derived channel flow depth parameters from Table 2. Added to Figure 4 is a graph of the expression which describes the optimal arrangement between channel width and topography when the effect of channel depth on  $P$  as well as the sediment transport term is neglected. Then

$$P_a = \text{const} (SQ/W) = \text{const} A^{z+(1-b)\theta(P)} \quad (36)$$

and for  $P_a$  to be constant,

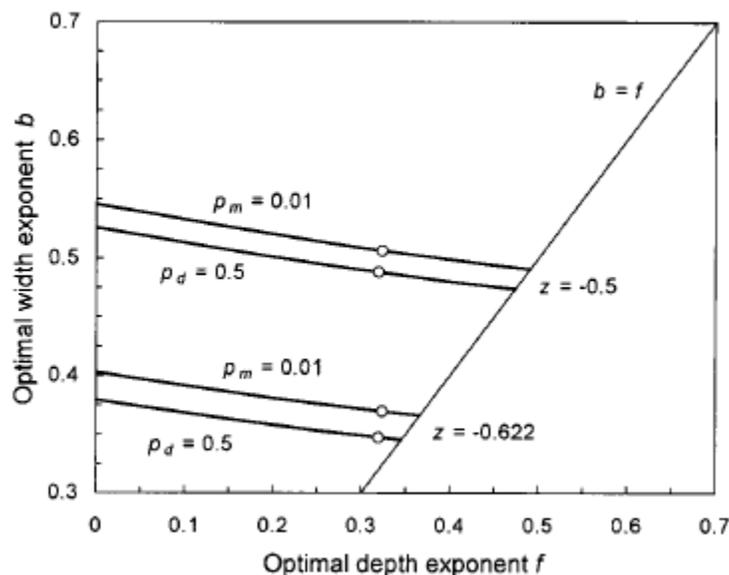

**Figure 3. Optimal combination of channel downstream hydraulic geometry exponents for width  $b$  and depth  $f$  for topographic conditions  $z = -0.5$  and  $z = -0.622$ , and average maximum daily and monthly stream flow conditions with exceedance probabilities  $p$ . Circles give the optimal conditions with data-derived values of  $f$  from Table 2.**

$$b = 1 + z/\theta(p) \quad (37)$$

The difference between the optimal combinations and the expression in (37) in Figure 4 shows the effect of channel depth on optimal energy dissipation. Equation (37) can also be obtained by combining (18)

and (19) and recognizing that  $z = \zeta \theta (p)$  from (23), and it shows the connection between the energy exponent  $\eta$  and optimal topography and channel geometry.

As was pointed out previously, the channel width-depth ratio in our network consisting of links with rectangular cross sections increases downstream if  $b > f$ . In Figure 4 the width-depth ratio is constant throughout the river network (equal to 25.3) when  $b = f = 0.320$ , and the corresponding optimal  $z$  is then  $-0.646$ . For the exponent  $b$  greater than 0.320, the width-depth ratio increases in the downstream direction. The value of the ratio is 4 at the upstream end of the river network when  $b = 0.736$ , and  $z = -0.288$  (the upstream end was defined by the channel initiation threshold  $A_t = 0.18 \text{ km}^2$ ). The channel width-depth ratio is a function of watershed properties such as silt and sand content, vegetation, etc., and therefore provides a natural constraint to the adjustment of the river system. The ratio commonly increases in the downstream direction, and natural river cross-sections rarely exhibit width-depth ratios below 4 [e.g., Chang, 1979; Knighton, 1984, p. 103]. This limits the range of optimal  $z$  value from Figure 4 to be between  $-0.288$  and  $-0.646$  (shown as the "range of optimality" in the figure). Langbein and Leopold [1964] argue that in nature a balance between constant  $P_a$  and minimum  $P_i$  leads to the scaling exponent  $z$  being somewhere in the range between  $-0.5$  and  $-1$ . Carlston [1968] reports  $z$  (assuming  $e(p) = 1$ ) to vary between  $-0.5$  and  $-0.93$  with an average of  $-0.65$ . The average value of the slope scaling exponent  $z$  observed from extensive DEM studies in the channeled fluvial zone was  $z = -0.5$  [Tarboton et al., 1989; wejjdsz-vasquez and Bras, 1995].

The analysis shows that channel widths and bed slopes are closely linked in the context of the hypothesis of local optimality in energy expenditure. Furthermore, they are connected to the total rate of energy expenditure in the river network through the energy exponent  $\eta$ .

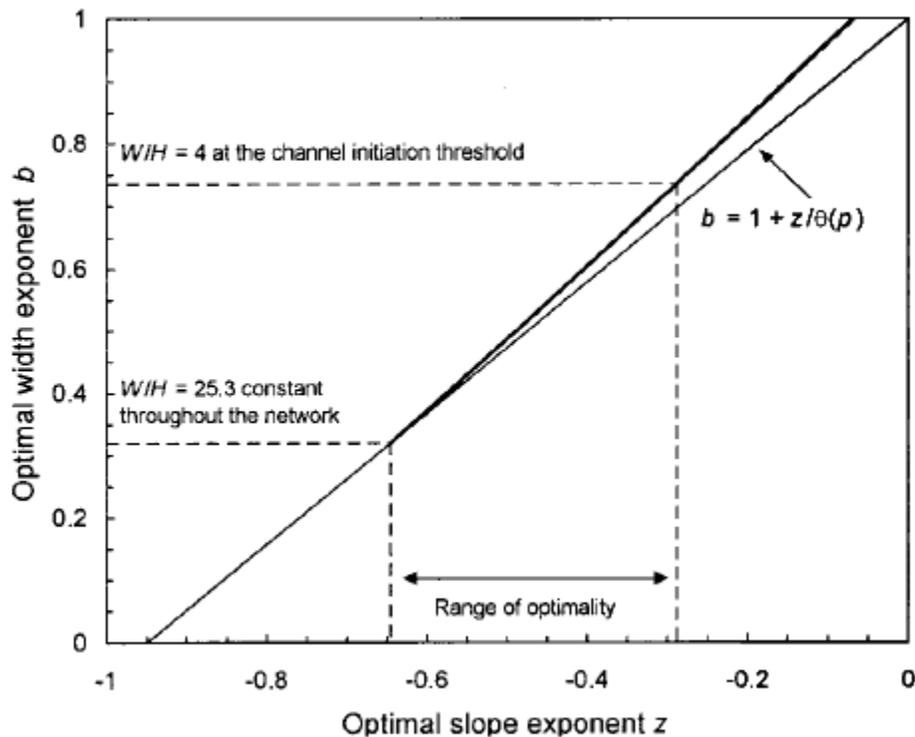


Figure 4. Optimal combination of the width downstream hydraulic geometry exponent  $b$  and the slope scaling exponent  $z$  for the maximum daily stream flow condition.



*Nagduari River with rock knob structure shows a general downstream increase in the friction factor, similar to many natural river systems. This would correspond to fairly steep and rough gravel bed channels.*

## 6. Conclusions

In this paper, it is explored that the river networks theory naturally evolve into structures with channel characteristics that are most efficient in the transport of water and sediment. The local optimal energy expenditure hypothesis of a constant energy dissipation rate per unit channel area  $P_a$  and its implications with regard to long-term average channel properties of a river system in equilibrium were investigated. The developed formulas for computing  $P_a$  throughout the river network and, using data from Nagduari Gorge, showed the interrelationships between downstream hydraulic geometry of channels, basin topography, and discharge driving conditions in networks that satisfy local optimality.

It is first showed that an expanded class of optimal river networks which includes drainage systems exhibiting trends in average flow velocity downstream can be defined. For these systems, channel resistance and flow velocity are not constant throughout the networks, but the product  $ffv^3$  is constant. It is developed that an optimal scaling relationship between average channel geometry and discharge where the downstream hydraulic geometry exponents for width and depth are equal, and

showed its effect on the energy exponent and the slope-discharge exponent.

On the basis of the optimal energy expenditure analysis conducted with Nagduari Gorge data, It is argued that the hypothesis of local optimality is a central principle that explains the average behavior of channel properties in river networks. The findings were as follows:

1. The downstream hydraulic geometry exponents  $b$  and  $f$  required to maintain constant energy dissipation rate  $P_a$  throughout the river network are similar to those observed in many natural

- river systems [Leopold and Maddock, 1953; Carlston, 1969; Park, 1977]. Numerous optimal combinations of the exponents  $b$  and  $f$  can be found for different flow and topographic conditions.
2. The value of the optimal exponent  $b$  is predominantly influenced by the topography of the watershed represented by the slope scaling exponent  $z$ . A range of optimality for both exponents  $z$  ( $-0.29$  to  $-0.65$ ) and  $b$  ( $0.32$  to  $0.74$ ) was found by analyzing width-depth ratios of the optimal channel networks.
  3. Optimal channel characteristics of the developed optimal networks were found to resemble properties observed in many natural river systems. Average flow velocity increased in the downstream direction, channel resistance in the form of the Darcy-Weisbach friction factor, and boundary shear stress decreased in the direction of flow. The function of channel resistance and flow velocity  $ffv^3$  was constant throughout the optimal network.
  4. The effect of sediment load in the form of added weight to the fluid-sediment mixture on the rate of energy dissipation  $P_a$  was insignificant. It amounted to less than 0.5% in the studied cases at Nagduari Gorge.
  5. The results presented above should be seen from two perspectives. First, they describe long-term average behavior of channel geometry as expressed by the downstream hydraulic geometry relations of Leopold and Maddock [1953] and do not have any predictive meaning at a given location in a river network. Constant channel adjustment will prevent the hypothesis of local optimality to be satisfied at any given time and space in a river network. The variability of  $P_a$  in an optimal network is an ongoing subject of study by the authors. Second, both the global and local hypotheses of optimality assume that the watershed (river network) is not bound in its adjustment. However, the underlying geology, vegetation, human interference, and many other factors will also affect the evolution and adjustment of the channel system. Although topological adjustment of river networks and the adjustment of channel characteristics occur at different timescales, one can visualize their complementary effects in creating optimal combinations of topography and channel geometry in a river basin. There are other concerns regarding the process of energy dissipation. For instance, it is essentially impossible to budget energy dissipation into the individual processes that create it on a river network scale. The determination of the amount of energy spent in a river network on overcoming system and surface roughness, transporting sediment, creating and moving bed-forms, internal turbulence, etc., remains an interesting research topic.

To conclude, the efficiency in energy expenditure provides an appealing rationality to the behavior of natural river systems and that it can be a very useful tool for studying the structure and properties of river networks.

#### References

- Andrew, Gondie. 2013; Channel equilibrium and threshold condition. Encyclopedia of Geomorphology, P-134
- Bathurst, J. C. 1993; Flow resistance through the channel network, in *Channel Network Hydrology*, edited by K. Beven and M. J. Kirkby, pp. 69-98, John Wiley, New York,.
- Carlston, C. W. 1968; Slope-discharge relations for eight rivers in the United States, *U. S. Geol. Surv. Prof. Pap.*, 600-D, 45-47,.
- Carlston, C. W. 1969; Downstream variations in the hydraulic geometry of streams: Special emphasis on mean velocity, *Am. J. Sci.*, 267, 499-509,.
- Chang, H. H. 1979; Minimum stream power and river channel patterns, *J. Hydrol.*, 41, 303-327,.
- Colaiori, F., Flammini, A., Maritan, A. and Banavar, J. R. 1997; Analytical and numerical study of optimal channel networks, *Phys. Rev. E*, 55(2), 1298-1310,.
- Dongre, N.L. 2013; Bed-Load Movement in The Steep Mountainous River, Denwa; Google Publication
- Dongre, N.L. 2013; Variability in Spatial Pattern of Bed Rock Incision; Google Publication
- Dongre, N.L. 2013; The Impact of Structural Adjustment On River Networks; Google Publication
- Gupta, V. K., and Dawdy, D. R. 1995; Physical interpretations of regional variations in the scaling exponents of flood quantiles, *Hydrol. Processes*, 9, 347-361,.
- Gupta, V. K., Mesa, O. J. and Dawdy, D. R. 1994; Multiscaling theory of flood peaks: Regional quantile analysis, *Water Resour. Res.*, 30(12), 3405-3421,.
- Howard, A. D., 1990; Theoretical model of optimal drainage networks, *Water Resour. Res.*, 26(9), 2107-2117,.
- Ijjasz-Vasquez, E. J., and Bras, R. L., 1995; Scaling regimes of local slope versus contributing area in digital elevation models, *Geomorphology*, 12, 299-311,.
- Ijjasz-Vasquez, E. J., Bras, R. L., Rodriguez-Iturbe, I., Rigon, R. and Rinaldo, A. 1993; Are river basins optimal channel networks?, *Adv. Water Resour.*, 16, 69-79,.

- Julien, P. Y., 1995; *Erosion and Sedimentation*, 280 pp., Cambridge Univ. Press, New York,.
- Knighton, D., 1984; *Fluvial Forms and Processes*, 218 pp., Edward Arnold, London,.
- Langbein, W. B., 1964; Geometry of river channels, *J. Hydraul. Div. Am. Soc. Civ. Eng.*, 90(HY2), 301-312,.
- Langbein, W. B., and Leopold, L. B. 1964; Quasi-equilibrium states in channel morphology, *Am. J. Sci.*, 262, 782-794,.
- Leopold, L. B., and Langbein, W. B. 1962; The concept of entropy in landscape evolution, *U. S. Geol. Surv. Prof. Pap.*, 500-A, 20 pp,.
- Leopold, L. B., and Maddock, T. 1953; The hydraulic geometry of stream channels and some physiographic implications, *U. S. Geol. Surv. Prof. Pap.*, 252, 57 pp,.
- Maritan, A., Colaioni, F. Flammini, A. Cieplak, M. and Banavar, J. R. 1996; Universality classes of optimal channel networks, *Science*, 272, 984-986,.
- Molnaar, P., 1996; Energy dissipation in a river network, M.S. thesis, 158 pp., Colo. State Univ., Fort Collins,.
- Parker, G. M., and Coleman, N. L. 1986; Simple model of sediment-laden flows, *J. Hydraul. Div. Am. Soc. Civ. Eng.*, 112(5), 356-375,.
- Paola, Chris. Straub, Kyle. Mohrig. David, 2009; Reinhardt Liam The “unreasonable effectiveness” of stratigraphic and geomorphic experiments Published by Elsevier B.V.
- Petts, G., and Foster, I. 1985; Channel morphology, in *Rivers and Landscape*, pp. 140-174, Edward Arnold, London,.
- Rigon, R., Rinaldo, A. Rodriguez-Iturbe, I. Bras, R. L. and Ijjaasz-Vaasquez, E. J. 1993; optimal channel networks: A framework for the study of river basin morphology, *Water Resour. Res.*, 29(6), 1635-1646,.
- Rigon, R., Rinaldo, A. and Rodriguez-Iturbe, I. 1994; On landscape self- organization, *J. Geophys. Res.*, 99(B6), 11,971-11,993,.
- Rinaldo, A., Rodriguez-Iturbe, I. Rigon, R. Bras, R. L. Ijjaasz-Vaasquez, E. J. and Marani, A. 1992; Minimum energy and fractal structures of drainage networks, *Water Resour. Res.*, 28(9), 2183-2195,.
- Rinaldo, A., Rodriguez-Iturbe, I. Rigon, R. Ijjaasz-Vaasquez, E. J. and Bras, R. L. 1993; Self-organized fractal river networks, *Phys. Rev. Lett.*, 70(6), 822-825,.
- Rodriguez-Iturbe, I., and Rinaldo, A. 1997; *Fractal River Basins: Chance and Self-Organization*, 547 pp., Cambridge Univ. Press, New York,.
- Rodraiguez-Iturbe, I., Rinaldo, A. Rigon, R. Bras, R. L. Marani, A. and Ijjaasz-Vaasquez, E. J. 1992; Energy dissipation, runoff production, and the three-dimensional structure of river basins, *Water Resour. Res.*, 28(4), 1095-1103,.
- Singh Vijay, P. 2003; On the theories of hydraulic geometry International Journal of Sediment Research, Vol. 18, No. 3, pp. 196-218
- Sun, T., P. Meakin, and Jossang, T. 1994; The topography of optimal drainage networks, *Water Resour. Res.*, 30(9), 2599-2610,.
- Tarboton, D. G., Bras, R. L. and Rodraiguez-Iturbe, I. 1989; Scaling and elevation in river networks, *Water Resour. Res.*, 25(9), 2037-2051,.
- Troutman, B. M., 1996; Inference for a channel network model and implications for flood scaling, in *Reduction and Predictability of Natural Disasters*, edited by J. B. Rundle, D. L. Turcotte, and W. Klein, pp. 97-116, Addison-Wesley, Reading, Mass.,.
- Troutman, B. M., and Karlinger, M. R. 1994; Inference for a generalized Gibbsian distribution on channel networks, *Water Resour. Res.*, 30(7), 2325-2338, Wilgoose, G., Bras, R. L. and Rodraiguez-Iturbe, I. 1989; A physically based channel network and catchment evolution model, *Rep. 322*, Ralph M. Parsons Lab., 464 pp., Mass. Inst. of Technol., 1989.
- Williams, G. P. 1978; Hydraulic geometry of river cross sections—Theory of minimum variance, *U. S. Geol. Surv. Prof. Pap.*, 1029, 47 pp,.
- Yang, C. T., and Song, C. C. S. 1986; Theory of minimum energy and energy dissipation rate, in *Encyclopedia of Fluid Mechanics*, edited by N. D. Chermisinoff, pp. 353-399, Gulf, Houston, Tex.,.